
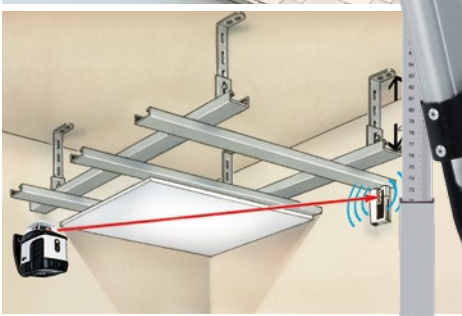
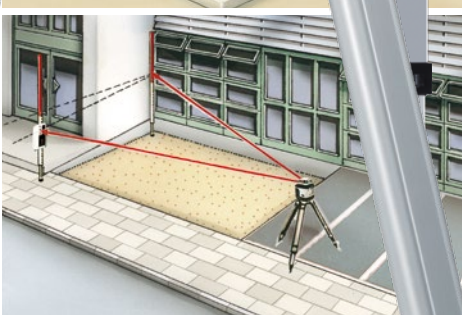
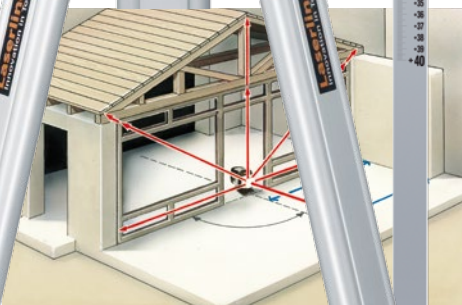


Laserliner®

AquaPro 120 Plus set 165 cm

Automatic rotary laser with laser receiver, stand and levelling staff

Rev.0614

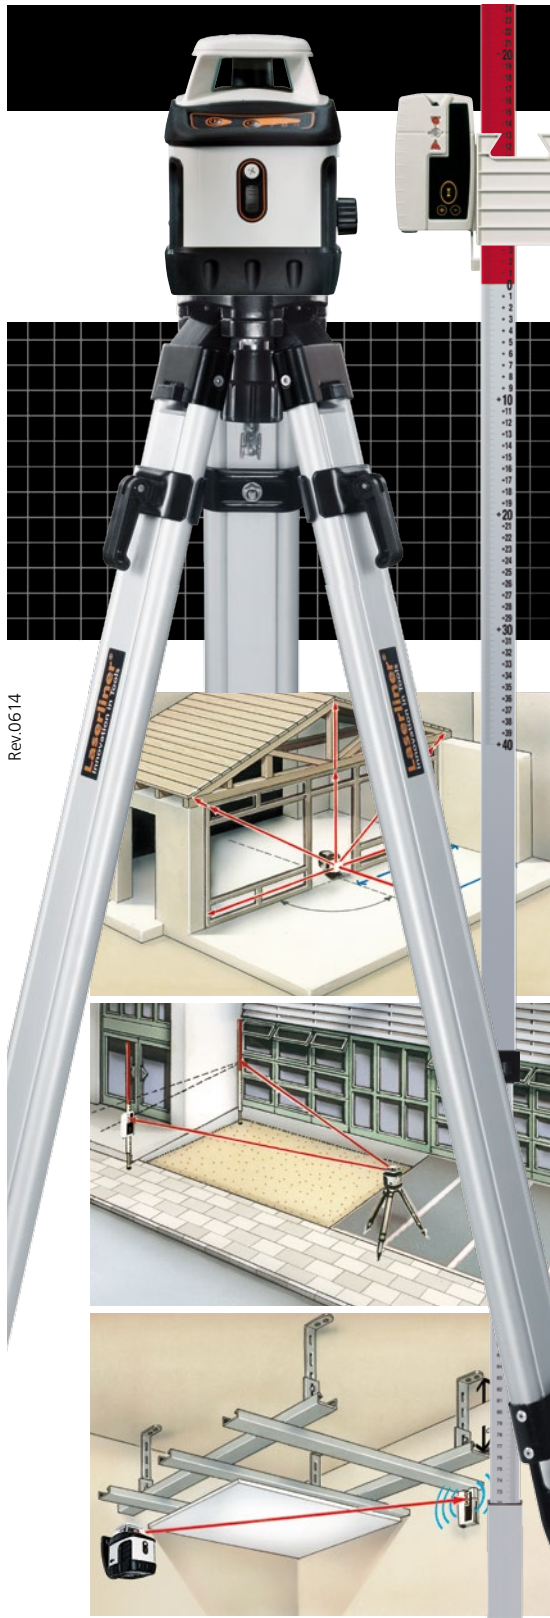

AquaPro 120

- **Automatic level:** Automatic rotary laser with horizontal self-levelling by means of magnetically damped pendulum system; vertical alignment with adjustable foot.
- A **vertical reference beam** is provided to plumb and align partition walls.
- Robust housing with **protective rubber casing**.
- **Out-of-level:** The device emits visual and acoustic signals to indicate that it is out of the levelling range.
- **Laser modes:** Rotary and hand receiver mode.
- **Inclination** can be set.
- **SpotLite marking function:** Prevents parallax errors and facilitates precise marking of reference levels.
- The **wall/floor console** can be vertically levelled or the unit can be attached to the wall.
- Pendulum restraint for safe transport.

SensoLite 120

- Laser receiver with head magnet.
- Max. laser reception range 120 m radius.
- High-luminosity LEDs on front and rear.
- Incl. universal mount.

165 cm lightweight aluminium tripod

- **Professional model** with 5/8" thread.
- Milled bearing surface, durable steel feet

Flexi levelling staff 240 cm

- For taking measurements from floor heights.
- **Differences in levels determined** without having to carry out any calculations.



Vertical operating position

Wall attachment


Compact laser receiver

ARTICLE	ARTICLE NO	EAN-CODE	PU
AquaPro 120 Plus set 165 cm	046.03.00A	4 021563 690527	1



TECHNICAL DATA

ACCURACY ± 2 mm / 10 m
SELF-LEVELLING RANGE ± 3.5°
LEVELLING Automatic horizontal / vertical with adjustable foot
LASER RECEPTION RANGE max. 120 m radius
LASER WAVELENGTH 635 nm
LASER class 2 < 1 mW
POWER SUPPLY 6 x type AA, approx. 45 hrs operating time high-performance batteries, approx. 20 hrs operating time, approx. 14 hrs charging time
PROTECTION CLASS IP 54
WEIGHT 8.4 kg



AquaPro 120 Plus set 165 cm

- inclusive AquaPro
- + SensoLite 120, universal mount
- + wall/floor base
- + flexi levelling staff
- + high-performance batteries
- + power supply/battery charger
- + softbag, batteries

inclusive aluminium lightweight tripod 165 cm
Packing dimension (W x H x D)
 240 x 1180 x 235 mm