

RangeXtender RX 30





Laser receiver for all line lasers with RX-READY technology

Rev. 0211



- With RX-READY, the laser lines pulsate at a high frequency. **This pulsation allows the range extender to detect laser lines up to a maximum of 30 m away.**
- **The universal mount** enables the device to be attached to levelling staffs.
- **Integrated head magnet**

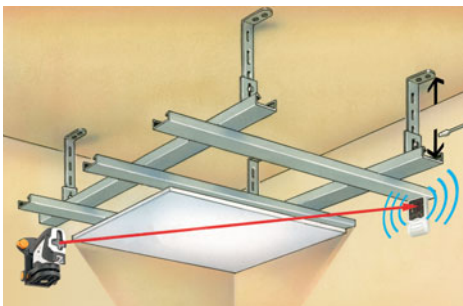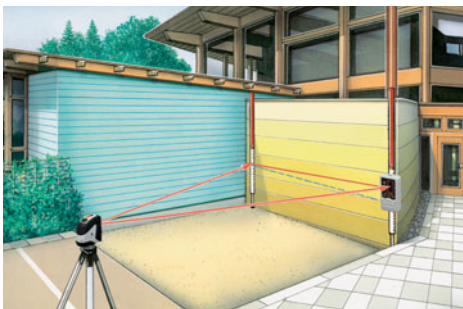

Max. reception range 50 m

Including universal mount

Integrated head magnet

TECHNICAL DATA

LASER RECEPTION RANGE
max. 30 m radius

POWER SUPPLY
1 x 9V block

WEIGHT 0.13 kg

DIMENSIONS
60 x 110 x 26 mm (WxHxD)



RangeXtender RX 30
including universal mount
+ batteries

Package size (W x H x D)
190 x 310 x 60 mm

| ARTICLE | ARTICLE NO. | EAN CODE | PU |
|--------------------|-------------|-----------------|----|
| RangeXtender RX 30 | 033.25A | 4 021563 672394 | 5 |

